

Modul'ion®-12 Medium Power Super-Phosphate™ (SLFP) 20 V or 40 V module

Li-ion module combining Energy and Power.
Suited for industrial vehicles and railway advanced battery systems.

Its modular design allows adaptation of the battery configuration, through serial or parallel connection, to reach the required energy and power for driving profile levels, up to hundreds of kWh in one functional entity.

The battery system comes equipped with Saft battery management electronics, thermal management (when application requires it), safety, communication and control interfaces to the host vehicle.

Applications

- Electric and hybrid vehicles
- Railway applications

Module features

- Quick recharge capabilities (e.g. regenerative braking application)
- High life cycle performance
- Light weight and compact design
- Robust construction withstanding onboard vehicle shocks and vibrations
- Liquid cooling/heating system
- CAN BUS communication

Benefits

- Facilitates on time vehicle development and integration thanks to its modular architecture
- Improves vehicle's driving range and reduces CO₂ footprint

Battery system features

- Modular system approach
- Scalable (series or parallel configurations) up to 1000 V or 200 kWh
- Saft Battery Management System (SOC, SOH, protection devices, current sensor)
- Active or passive thermal management



	Modul'ion®-12 Medium Power	
	40.41 MFe	20.82 MFe
Nominal characteristics at +25°C / +77°F		
Nominal voltage (V)	39.6	19.8
Rated capacity (C/5) (Ah)	39	78
Typical capacity (C/5) (Ah)	41	82
Typical energy (C/5) (Wh)	1624	1624
Volumetric energy (Wh/l)	141	141
Gravimetric energy (Wh/kg)	105	105
Mechanical characteristics		
Width (mm)	375	375
Height (mm)	270	270
Depth (mm)	114	114
Weight (kg)	15.4	15.4
Thermal management	Liquid cooled /heated	Liquid cooled /heated
Electrical characteristics at +25°C / +77°F		
Voltage window (V)	45.6 to 30	22.8 to 15
Max. continuous discharge current (A)	150	200
Max. continuous charge current (A)	41	82
Max. pulse discharge current in 10 s (A)	300	600
Max. pulse charge current in 10 s (A)	180	360
Power peaks in 10 s (kW)	17.8	11.8

Data are typical value, please consult Saft for battery sizing



SAFT

Safety

Safety driven design for cells, modules and systems guarantees safe behavior in case of abuse usage or component failure. This includes:

- Stringent design rules and qualification
- Implementation of redundant safety features
 - at cell level (e.g. shutdown effect separator and mechanical vent)
 - at module level (e.g. electronic board, voltage and temperature monitoring, balancing)
 - at battery level (e.g. electronic board, power switch and current sensor)



Operating conditions

Operating temperature	- 25°C to +60°C (-13°F to 140°F)
Calendar lifetime (+25°C/+77°F)	20 years
Recommended temperature for transport and storage	+10°C to +30°C (50°F to 86°F)
Allowable temperature for transport and storage	-40°C to +70°C (-40°F to 158°F)
Storage time for self-discharge	6 months


Design to comply with

Cell safety	UL 1642
Transport qualification	UN 3480, class 9 (group II)
Marking	CE
Fire and smoke	NFF 16-101/102 (cat. A1) NFPA 130
Shock and vibration	IEC 61373
Directives / Regulations	REACH*, Voluntary RoHS**

*REACH: The Saft group has adopted internal procedures to ensure conformity with the European REACH Regulation

**RoHS: Also batteries are not within the scope of the RoHS Directive, Saft has taken voluntary measures to ensure that the substances forbidden by RoHS are not present in the battery, with the exception of the electrochemical core.

Discharge according to C rate +25°C

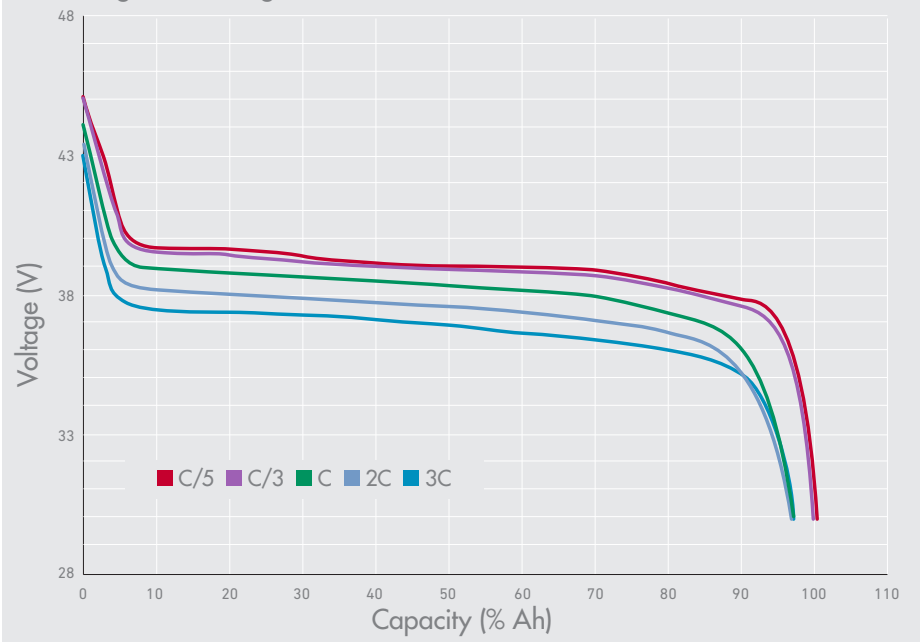

Contact Technical Support for the performance of your specific configuration

Data are typical value, please consult Saft for battery sizing upon specific profile



Saft

12, rue Sadi Carnot
93170 Bagnolet - France
Tel. : +33 1 49 93 19 18
Fax : +33 1 49 93 19 64
www.saftbatteries.com

Doc No.: 21888-2-0815

Edition: August 2015

Data in this document is subject to change without notice and becomes contractual only after written confirmation.

Société par Actions Simplifiée au capital de 31 944 000 €

RCS Bobigny B 383 703 873

Produced in the UK by Arthur Associates Limited